

A Fundamental Part of the Total Spline Solution







Go composite side fit plug/ring gages No Go Sector plug/ring gages

Max. diameter: 500mm Min. diameter: 5mm

Max. number of teeth: 500 Max. pitch: 25.4 module Min. pitch: 0.1 module Max. tooth length: 300 Typical Tolerances Profile: 0.005mm

Total Spacing: 0.005mm

Runout: 0.005mm

Tooth Alignment: 0.0025mm Tooth Thickness: 0.005mm Max. diameter: 355mm


Min. dimeter: 5mm

Max. number of teeth: 500 Max. pitch: 25.4 module Min. pitch: 0.1 module Max. tooth length: 150 Typical Tolerances Profile: 0.005mm

Total Spacing: 0.005mm

Runout: 0.005mm

Tooth Alignment: 0.0025mm Tooth Thickness: 0.005mm EST designs & manufactures Spline Gages for all your spline inspection and measurement requirements.

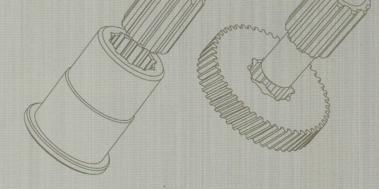



Handheld double balls variable plug gage with setting master ring.

Min. diameter: 5mm.




Table stand double balls variable gage with setting master plug/ring gage

Min. diameter: 5mm.



Handheld circular tooth thickness/ space width gage with setting master

Min. diameter: 5mm.



Table stand double balls variable gage with digital indicator



Spline shaft with tapered teeth







Customized Gages

EST Tools America, Inc., Ever Sharp Tools, Inc. www.EST-US.com U.S. Sales & Service Center

Address: 10138 Radiance Drive, Ira Township, Michigan USA 48023

Telephone: (810) 824-3323 Email: sales@est-us.com